

SPINBUSKIT 23

SOLEMYO OPERA BLUEBUS 24V

For sectional doors up to 10.5 m²
and up-and-over garage doors up to 11.8 m².

With pre-mounted 3-metre guide.

Rapid installation - anywhere!

The adjustable head, cord-type release and cable-controlled, step-by-step release can be fitted in any part of the garage in order to actuate the system without a remote control device and without the need to install wall-mounted control units!

Guaranteed savings and respect for the environment:
with connection to the mains in standby mode the control unit with radio connected consumes just 5.2 W; when connected to a battery or to the Solemyo kit, consumption on standby is reduced to 0.036 W.

Safe: obstacle detection system and automatic programming of the working times; motor absorption is monitored during movement, self-diagnosis by means of a flashing light and courtesy light. Acceleration and deceleration can be adjusted at the beginning and end of each opening and closing manoeuvre. Can be connected with last generation sensitive edges 8.2 KOhm.

Courtesy light: 21 W lamp.

No black out: operation in the event of a power failure with optional batteries (PS124) housed inside the motor.

CODE	DESCRIPTION	PACK/PALLET	PRICE €
SPIN23KCE	KIT FOR AUTOMATING SECTIONAL AND UP-AND-OVER DOORS. PRE-MOUNTED GUIDE IN ONE 3-METRE SECTION	15	570,50

N.B. The content of the package may vary; consult the retailer.

TECHNICAL SPECIFICATIONS


CODE	SN6021
ELECTRICAL DATA	
POWER SUPPLY (Vac 50/60 Hz)	230
ABSORPTION (A)	0.8
POWER (W)	250
PERFORMANCE DATA	
SPEED (m/s)	0.20
FORCE (N)	650
WORK CYCLE (CYCLES/DAY)	50
DIMENSIONAL AND GENERAL DATA	
PROTECTION LEVEL (IP)	40
WORKING TEMP. (°C MIN/MAX)	-20 ÷ +50
DIMENSIONS (mm)	311x327x105 h
WEIGHT (kg)	3.6

UTILISATION LIMITS

Using the maximum travel

	NON-PROJECTING UP-AND-OVER DOOR		PROJECTING UP-AND-OVER DOOR		SECTIONAL	
	H	L	H	L	H	L
SPIN23KCE	2.2 m	4.2 m	2.8 m	4.2 m	2.4 m	4.4 m

DIMENSIONS

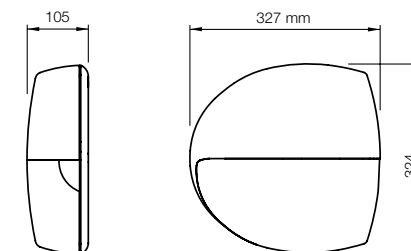

THE KIT CONTAINS:


SN6021
1 GEAR MOTOR WITH BUILT-IN CONTROL UNIT AND SMXI PLUG-IN RECEIVER.



FLO2RE
1 TRANSMITTER
433.92 MHz, 2 CHANNELS.



SNA30
GUIDE
IN ONE 3-METRE SECTION.



1 x 3 m



SNA20
SPARE CONTROL UNIT
FOR SPIN23KCE.
**(SEE SPARE PARTS
PRICE-LIST)**



PS124
24 V BATTERY
WITH INTEGRATED
BATTERY CHARGER.
PC/PACK 1
€ 98,50



SPA2
KIT FOR UNLOCKING FROM
THE OUTSIDE WITH CABLE.
PC/PACK 1
€ 25,60



SPA5
OSCILLATING ARM SLIDING
ON BEARINGS WITH OPTIMISED
STRUCTURE FOR PROJECTING
UP-AND-OVER DOORS.
PC/PACK 1
€ 143,00



SPA6
LARGE 585 mm LONG
CONNECTING ARM.
PC/PACK 1
€ 13,50



SPA7
KIT OF TWO ADDITIONAL
FIXING BRACKETS.
PC/PACK 2
€ 13,50*



SNA16
QUICK-CONNECT BRACKETS
FOR CEILING MOUNTING.
PC/PACK 10
€ 47,40*



920132111001
PAIR OF PHOTOCELLS
FOR OPTICAL TYPE
SENSITIVE EDGE.
PC/PACK 1
€ 75,00



● THE SOLAR POWER
KIT SOLEMYO TO AUTOMATE
GATES, GARAGE DOORS
OR BARRIER GATES,
INCLUDING THOSE LOCATED
FAR FROM THE POWER MAINS
AND WITHOUT THE NEED
FOR COSTLY AND INVASIVE
EXCAVATION WORK.
SEE PAGE 171




TS
SIGNBOARD.
PC/PACK 1
€ 3,20




INSTALLATION DIAGRAM


Sectional

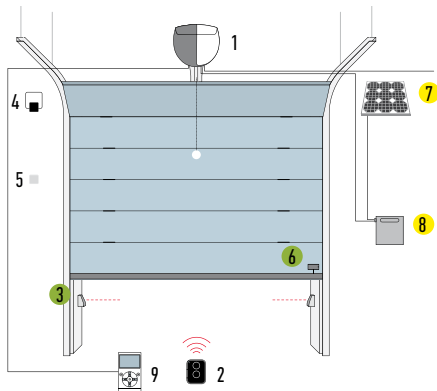

Non-projecting up-and-over door

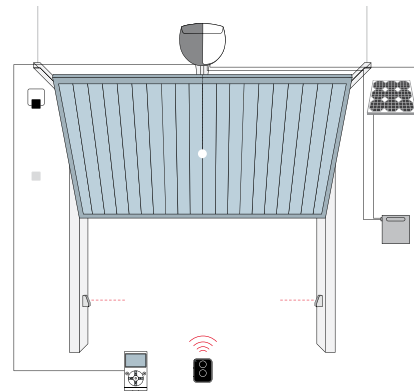

Projecting up-and-over door

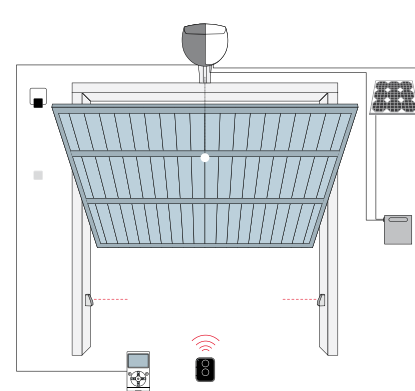

1. SPINBUS
2. TRANSMITTER
3. PHOTOCELLS
4. FLASHING LIGHT
5. DIGITAL OR KEY SWITCHES
6. SENSOR FOR SENSITIVE EDGES
7. SYP SOLAR PANEL
8. PSY24 BATTERY BOX
9. O-VIEW MULTIFUNCTION DISPLAY

- ACCESSORIES ALSO AVAILABLE FOR THE Solemyo Air Net System WIRELESS VERSION
- Solemyo SOLAR POWER ACCESSORIES

* The price refers to the sale pack. Nice recommends customers order products in pallets in order to facilitate storage and delivery, and ensure packs are uniform. The number of packs per single pallet has been specified for this reason. Approximate draft.